

Features and Benefits

- Smooth and compliant surface
- Electrically isolating
- RoHS compliant
- Sheet form, roll form and die-cut options

Typical Applications

- Power supplies
- Automotive electronics
- Motor controls
- Power semiconductors

Optional Configurations

- Can be die-cut into specific dimensions

The OI-1000 is a series of thermally conductive material with electrical isolation property. It is especially suitable for applications where low mounting pressures for component clamping is required e.g. low component clamping forces for discrete semiconductors mounted with spring clips for a speedy assembling process.

The smooth and compliant surface characteristics of OI-1000 materials can minimize interfacial thermal resistance and maximize thermal performance for such applications. OI-1000 is ROHS compliant and halogen free, offering extra reassurance in applications where hazardous substances are forbidden.


Properties	OI-1000 Series	Test Method
Construction & Composition	Reinforced ceramic-filled silicone elastomer	—
Color	Grey, Green, Yellow	—
Thickness	0.01~0.018" (0.254~0.457)	—
Specific gravity (g/cm ³)	> 1.6	ASTM D297
Hardness (Shore A)	70 ± 5	ASTM D2240
Tensile Strength (kgf/cm ²)	> 180	ASTM D412
Dielectric Strength (kV/mm)	> 6	ASTM D149
Thermal Conductivity (W/m-K)	1.2	ASTM D5470 (modified)
Temperature Range (°C)	-40~240	—
Flammability Rating	UL94-V0 Equivalent	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for all thickness
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Optional to all thickness
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Not Recommended

Product Code and Descriptions

OI 10 XX - XX - XX - 00 - XX

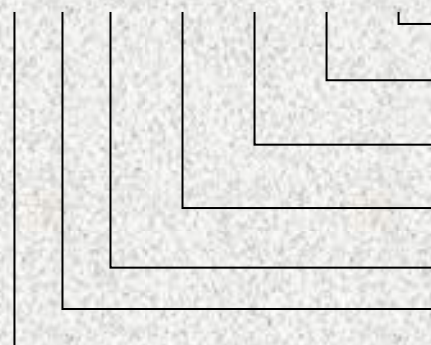

Dimensions
 SS = Standard sheet size
 CD = Custom dimensions

Release Liner
 00 = Standard without Release Liner

PSA
 00 = Standard without PSA
 A1 = One side
 A2 = Both sides

Carrier
 00 = Standard with Fiberglass

Thickness (mil)
 00 = Custom thickness
 01 = 10mil

10 = OI-1000 Series

OI = OpTIM™ Insulator

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606, USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge),
 Belgium

SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T.,
 Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China,
 523525.