

Features and Benefits

- 1.5W/m-K thermal conductivity
- Exceptional compressibility
- Cost effective
- Naturally tacky
- Electrically isolating



Typical Applications

- Notebook and desktop computers
- Memory modules
- Heat pipe assemblies
- HDDs and DVDs
- Flat-panel displays
- Telecommunication hardware

Optional Configurations

- Can be die-cut into specific dimensions

OP 8300 Spec 02 is a ceramic filled silicone elastomer. It is exceptionally soft and is suitable for applications that require moderate thermal performance. The formulation of OP-8300 Spec02 is designed to be RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.

OP 8300 Spec 02 is electrically non-conductive and naturally tacky. Additional adhesive is generally not required.


Properties	OP-8300 Spec 02	Test Method
Construction & Composition	Soft silicone elastomer	—
Color	Sky Blue	Visual
Thickness Range /inch (mm)	0.01"~0.40" (0.254~10.16) in 0.01" (0.254) increments	—
Standard Sheet Size	12" x 16"	—
Density /g.cm ⁻³	1.8	—
Hardness /Shore 00	20	ASTM D2240
UL Flammability Rating	UL94 V0	—
Temperature Range /°C	-40~200°C	—
Thermal Conductivity W.m ⁻¹ .K ⁻¹	1.5	ASTM D5470 (modified)
Breakdown Voltage /V	>5000 (Thickness ≤ 0.03") >6000 (Thickness = 0.04~0.05") >10000 (Thickness ≥ 0.06")	ASTM D149
Volume Resistivity /ohm.cm	3.2 x 10 ¹³	ASTM D257
Dielectric Constant @ 1MHz	5.1	ASTM D150
Shelf Life /Months	24	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for ≤ 0.03" (0.75mm)
Rubberized Cloth (RC)	Optional to all thickness
Pressure Sensitive Adhesive (PSA)	Not Recommended
Detachable Adhesive (DA)	Optional to ≥ 0.039" (1.0mm)
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Optional to all thickness

Product Code and Descriptions

OP 83 XX Spec 02 -XX -XX -XX -XX

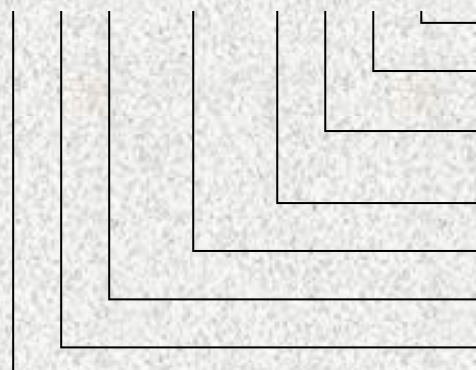

- Dimensions**
SS = Standard sheet size
- Release Liner**
ST = Standard
OT = Other
- PSA**
A1 = One side
A2 = Both sides
OT = Other
- Carrier**
FG = Fiberglass
AL = Aluminum foil
CB = Combination
OT = Other
- Spec 02 = Special Derivative #**
- Thickness (mil)**
00 = Custom thickness
04 = 40mil
- 83 = 8300 Series**
OP = OPTIM™ gap filler

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606,
 USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge),
 Belgium



SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T.,
 Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

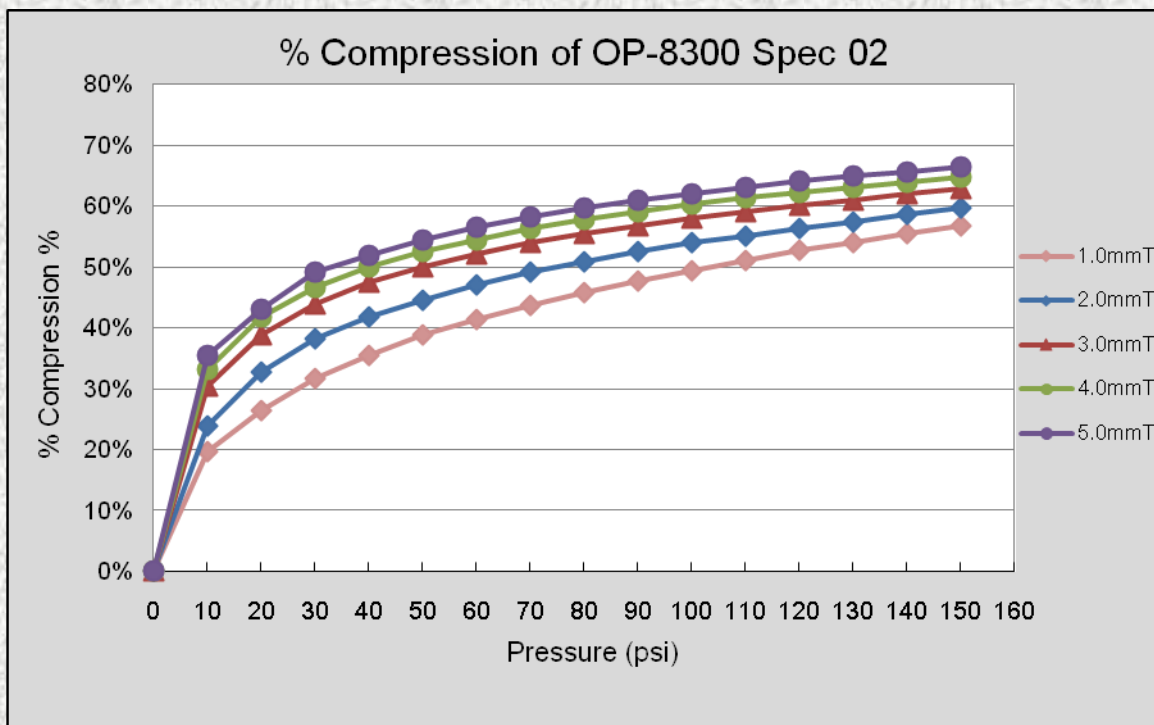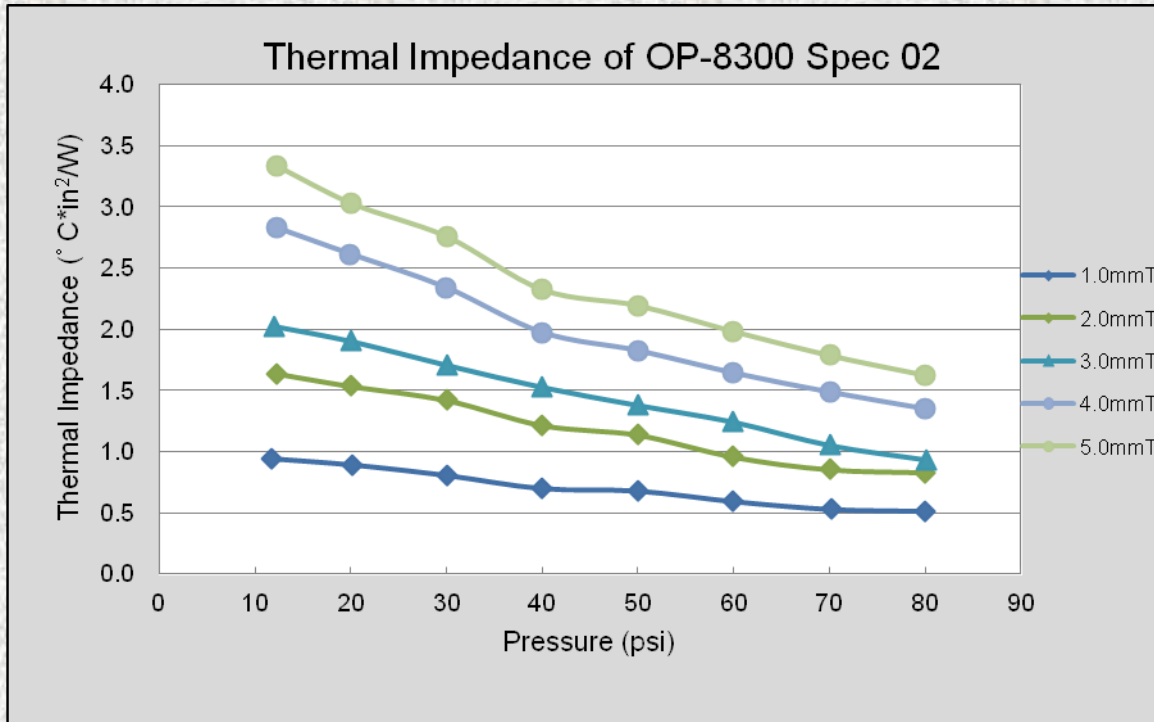

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606,
 USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge), Belgium

SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.