


Features and Benefits

- 2.0W/m-K thermal conductivity
- High breakdown voltage
- Tough and high tensile strength
- Electrically Isolating

OP-8400 Spec 10 offers high thermal performance and high dielectric strength. It is suitable for applications where electrical isolating property is needed.

OP-8400 Spec 10 has high tensile strength and can prevent surface penetration by sharp intrusion hence, ensuring its electrical isolating properties. It is compliant to RoHS standard while maintaining its halogen-free status.



Typical Applications

- Automotive control units
- Power supply
- Audio and video component
- General high pressure interface

Optional Configurations


- Adhesive coatings are optional
- Can be die-cut into specific dimensions

Properties	Typical Data	Test Method
Construction & Composition	Reinforced soft silicone elastomer	—
Color	Pink	Visual
Thickness Range /inch (mm)	0.01~0.03" (0.254~0.762) in 0.01" (0.254) increments	—
Standard Sheet Size	9" x 9"	—
Density /g.cm ⁻³	2.7	—
Hardness /Shore 00	80	ASTM D2240
Tensile Strength /psi	868	ASTM D412
UL Flammability Rating	Meet with UL94 V0	—
Temperature Range /°C	-40~200°C	—
Thermal Conductivity W.m ⁻¹ .K ⁻¹	2.0	ASTM D5470 (modified)
Breakdown Voltage /V	>5000	ASTM D149
Volume Resistivity /ohm.cm	5.5 x 10 ¹³	ASTM D257
Dielectric Constant @ 1MHz	3.8	ASTM D150
Shelf Life /Months	24 months	—
Please contact us for other special requirements		

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for all thickness
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Optional to all thickness
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Not Recommended

Product Code and Descriptions

OP 84 XX Spec 10 -XX -XX -XX -XX

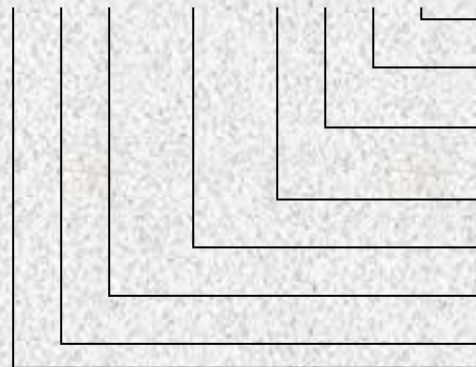

- Dimensions**
SS = Standard sheet size
- Release Liner**
ST = Standard
OT = Other
- PSA**
A1 = One side
A2 = Both sides
OT = Other
- Carrier**
FG = Fiberglass
RC = Rubberized Cloth
CB = Combination
OT = Other
- Spec 10 = Special Derivative #**
- Thickness (mil)**
00 = Custom thickness
04 = 40mil
- 84 = 8400 Series**
OP = OPTIM™ gap filler

SEM (North America) Inc.

Tel: +1 585-643-2000
Fax: +1 585-427-7216
Address: 1600 Lexington Ave., Suite 236A,
Rochester, NY 14606,
USA

SEM Belgium bvba


+32 59 560 270
+32 59 560 271
Slijpesteenweg 28,
8432 Middelkerke (Leffinge),
Belgium

SEM (Far East) Ltd.

+852 2686 9872
+852 2686 9728
Unit 3, 3/F, Blk A, New Trade Plaza,
No. 6 On Ping St., Shatin, N.T.,
Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
+86-769-8334 2028
No.8 Qiaoxin Rd., Qiaotou Dongguan,
Guangdong, China, 523525.

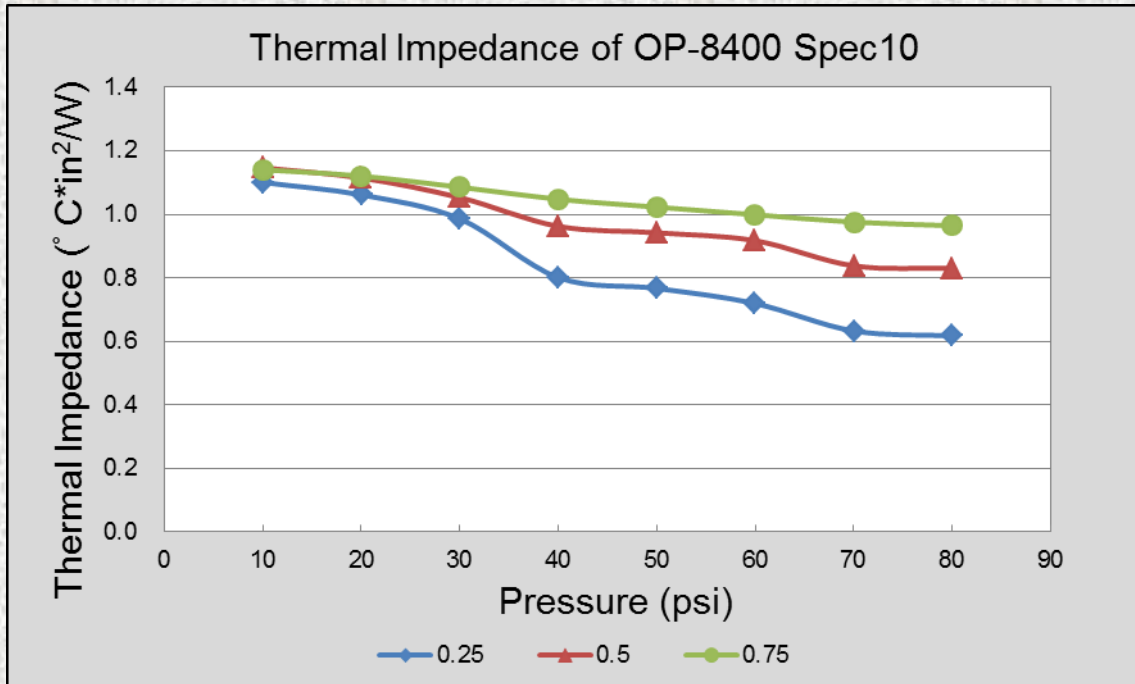

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606,
 USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge), Belgium

SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.