

Features and Benefits

- Superior thermal performance
- 3.6 W/m-K thermal conductivity
- Good EMI suppression
- RoHS compliant
- Halogen-free



Typical Applications

- Notebook Computers
- Handheld Portable Electronics
- Micro Heat Pipe assemblies
- Micro Processors, Memory Chips and Graphic Processors
- Motor Control
- Wireless Communication Hardware

Optional Configurations

- Can be die-cut into specific dimensions

OP-7600 Spec01 offers hybrid absorber/thermal management material that is used for EMI mitigation. Designed using silicone gel binder that imparts inherent tack typical of standard thermal gap fillers. Filler particle composition imparts both excellent thermal conductivity and good EMI suppression in the microwave frequency.

The proprietary formulation of OP-7600 Spec01 is RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.


Properties	OP-7600 Spec01	Test Method
Construction & Composition	Soft silicone elastomer	—
Color	Dark grey	Visual
Thickness Range /inch (mm)	0.02"~0.12" (0.508~3.048) in 0.01" (0.254) increments	—
Standard Sheet Size	9" x 9"	—
Density /g.cm ⁻³	3.7	ASTM D792
Hardness /Shore 00	50	ASTM D2240
Tensile Strength /psi	33	ASTM D638
UL Flammability Rating	UL94 V0	UL
Temperature Range /°C	-40°C ~175°C	—
Thermal Conductivity W.m ⁻¹ .K ⁻¹	3.6	ASTM D5470 (modified)
Volume Resistivity /ohm.cm	2.30 x 10 ¹⁰	ASTM D257
EMI Attenuation @ 10 GHz	48 dB/cm	—
Shelf Life /Months	12	—

Please contact us for other requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Not Recommended
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Not Recommended
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Not Recommended

Product Code and Descriptions

OP 76 XX - XX - XX - XX - XX

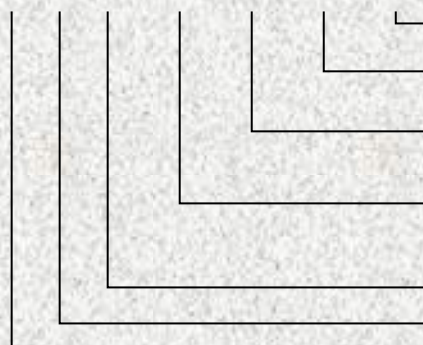

- Dimensions**
 SS = Standard sheet size
 CD = Custom dimensions
- Release**
 ST = Standard
 OT = Other
- PSA**
 A1 = One side
 A2 = Both sides
 OT = Other
- Carrier**
 FG = Fiberglass
 CB = Combination
 OT = Other
- Thickness(mil)**
 00 = Custom thickness
 04 = 40mil
- 76 = 7600 Series**
OP = TIMSor™ gap filler

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1555 Jefferson Road,
 Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
 Schatting 73,
 8210 Zedelgem, Belgium

SEM Asia Ltd.


+852 2686 8168
 +852 2686 8268
 Unit 1, 3/F Block A, New Trade Plaza,
 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.


+86-769-8334 1628
 +86-769-8334 2028
 No. 8A Qiaoxin Road, Qiaotou,
 Dongguan, Guangdong, China
 Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

Thermal Impedance of OP-7600 Spec 01

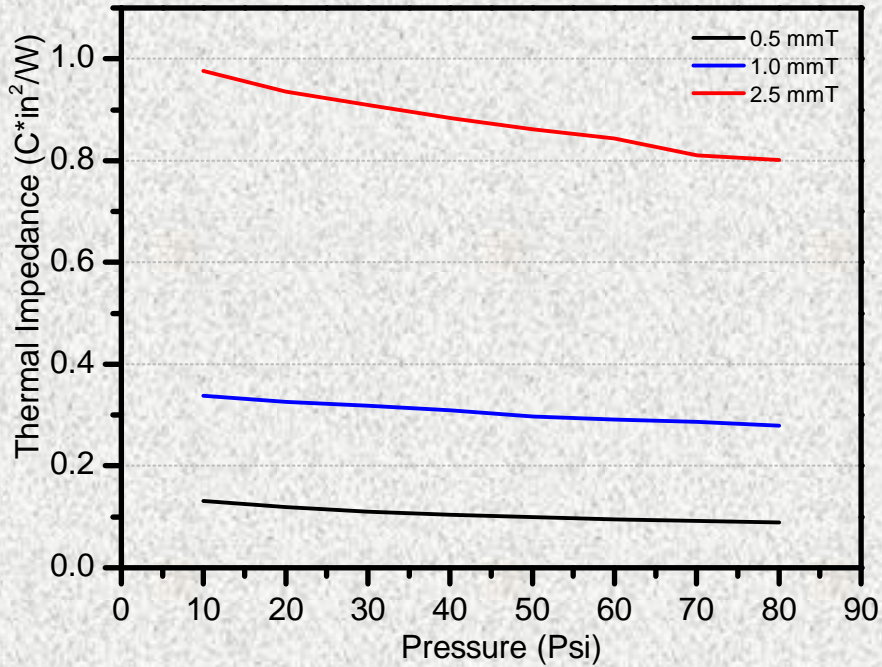

Attenuation of OP-7600 Spec01

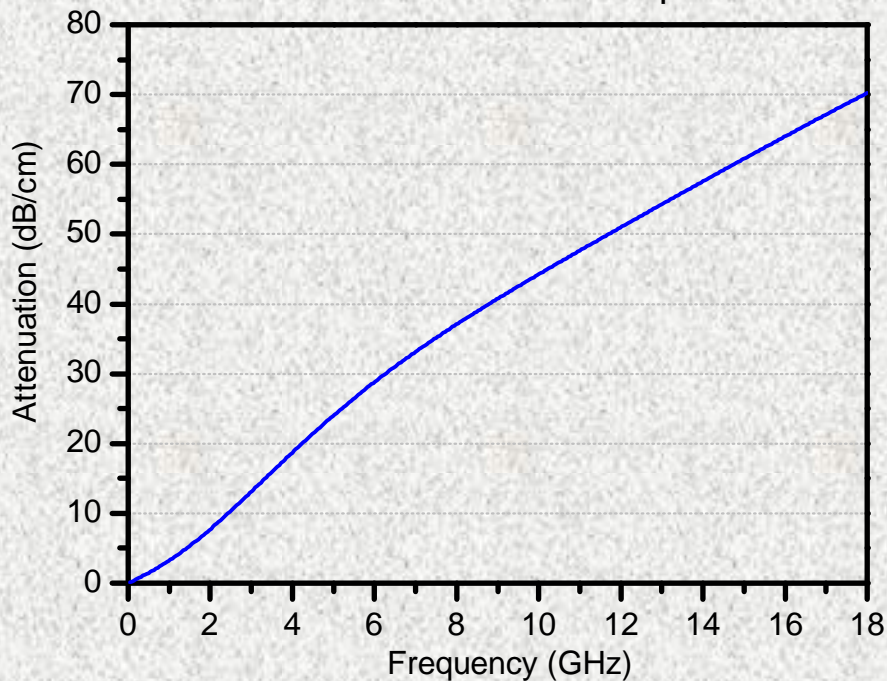

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1555 Jefferson Road,
 Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
 Schatting 73,
 8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168
 +852 2686 8268
 Unit 1, 3/F Block A, New Trade Plaza,
 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628
 +86-769-8334 2028
 No. 8A Qiaoxin Road, Qiaotou,
 Dongguan, Guangdong, China
 Postal code 523525