


THERMALLY CONDUCTIVE GAP FILLER

Features and Benefits

- 1.2W/m-K thermal conductivity
- Moderate compressibility
- Cost effective
- · Electrically isolating
- RoHS compliant
- Halogen-free



Typical Applications

- High speed mass storage devices
- RDRAM memory modules
- Heat pipe assemblies
- Cooling components to the chassis, frame or other types of heat spreader
- Motor controls
- Wireless communication hardware

Optional Configurations

• Can be die-cut into specific dimensions

OP-8100 is a gap filling material suitable for cost sensitive applications.

It is electrically non-conductive and offers moderate thermal conductivity and compressibility.

The proprietary formulation of OP-8100 is RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.

Properties	OP-8100 Series	Test Method
Construction & Composition	Soft silicone elastomer	-
Color	Blue	Visual
Thickness Range /inch (mm)	0.01~0.40" (0.254~10.16) in 0.01" (0.254) increments	1 Cara-
Standard Sheet Size	12" x 16"	= 10
Density /g.cm ⁻³	1.76	<u> </u>
Hardness /Shore 00	60	ASTM D2240
Tensile Strength /psi	52	ASTM D412
UL Flammability Rating	UL94 V0	E109346
Temperature Range /°C	-40~200℃	
Thermal Conductivity W.m ⁻¹ .K ⁻¹	1.2	ASTM D5470 (modified)
Breakdown Voltage /V	>6000 (Thickness ≤ 0.05") >10000 (Thickness ≥ 0.06")	ASTM D149
Volume Resistivity /ohm.cm	3.0 x 10 ¹³	ASTM D257
Dielectric Constant @ 1MHz	5.0	ASTM D150
Shelf Life /Months	24	

Please contact us for other special requirements

Carrier Treatment	Criteria	
Fiber Glass (FG)	Compulsory for ≤ 0.02" (0.5mm)	
Rubberized Cloth (RC)	Not Recommended	
Pressure Sensitive Adhesive (PSA)	Optional to all thickness	
Detachable Adhesive (DA)	Not Recommended	
Aluminum Foil (AL)	Not Recommended	
Kapton (PI)	Not Recommended	
Talc treatment (DAT)	Not Recommended	

SEM (North America) Inc.


Tel: +1 585-643-2000 Fax: +1 585-427-7216 Address: 1555 Jefferson Road, Rochester, NY 14623

SEM Belgium by

+32 59 560 270

Schatting 73, 8210 Zedelgem, Belgium

Product Code and Descriptions

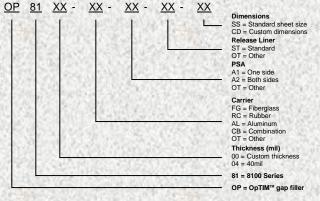


SEM Asia Ltd.


+852 2686 8168 +852 2686 8268 Unit 1, 3/F Block A, New Trade Plaza, 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628 +86-769-8334 2028 No. 8A Qiaoxin Road, Qiaotou, Dongguan, Guangdong, China Postal code 523525

THERMALLY CONDUCTIVE GAP FILLER

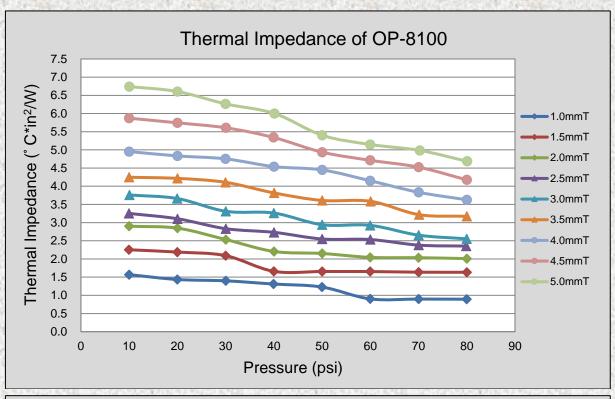

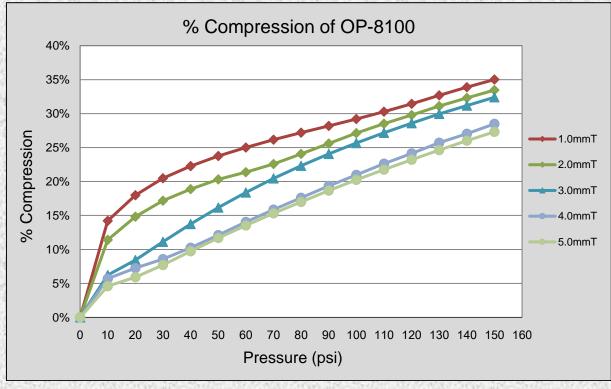



Tel: +1 585-643-2000 Fax: +1 585-427-7216 Address: 1555 Jefferson Road, Rochester, NY 14623

SEM Belgium bv +32 59 560 270

Schatting 73, 8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168 +852 2686 8268 Unit 1, 3/F Block A, New Trade Plaza, 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628 +86-769-8334 2028 No. 8A Qiaoxin Road, Qiaotou, Dongguan,Guangdong, China Postal code 523525