


**Features and Benefits**

- 2.0W/m-K thermal conductivity
- High breakdown voltage
- Tough and high tensile strength
- Electrically Isolating

OI-2000 Spec 02 offers high thermal performance and high dielectric strength. It is suitable for applications where electrical isolating property is needed.

OI-2000 Spec 02 has PI in the middle and can prevent surface penetration by sharp intrusion hence, ensuring its electrical isolating properties. It is compliant to RoHS standard while maintaining its halogen-free status.



**Typical Applications**

- Automotive control units
- Power supply
- Audio and video component
- General high pressure interface

**Optional Configurations**

- Adhesive coatings are optional
- Can be die-cut into specific dimensions


Properties	Typical Data	Test Method
Construction & Composition	Reinforced soft silicone elastomer	—
Color	Pink	Visual
Thickness Range /inch (mm)	0.0086~0.03" (0.22~0.762mm)	—
PI Carrier Thickness/mm	0.05	—
Standard Sheet Size	9" x 9"	—
Density /g.cm <sup>-3</sup>	2.6	—
Hardness /Shore 00	80	ASTM D2240
UL Flammability Rating	Meet with UL94 V0	—
Temperature Range /°C	-40~200°C	—
Thermal Conductivity W.m <sup>-1</sup> .K <sup>-1</sup>	2.0	ASTM D5470 (modified)
Breakdown Voltage /V	>5000V (Thickness ≥0.22mm)	ASTM D149
Volume Resistivity /ohm.cm	5.5 x 10 <sup>13</sup>	ASTM D257
Dielectric Constant @ 1MHz	3.8	ASTM D150
Shelf Life /Months	24	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Optional to all thickness
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Talc treatment (DAT)	Not Recommended

**Product Code and Descriptions**

OI 20 XX Spec 02 -XX -XX -XX -XX

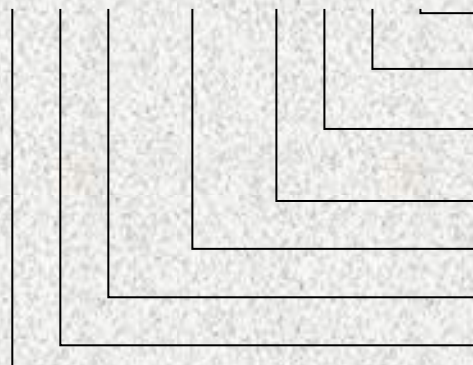

**Dimensions**  
 SS= Standard sheet size  
 CD = Custom dimensions

**Release** **Liner**  
 ST = Standard  
 OT = Other

**PSA**  
 A1 = One side  
 A2 = Both sides  
 OT = Other

**Carrier**  
 FG = Fiberglass  
 CB = Combination  
 OT = Other

**Spec 02 = Special Derivative #**

**Thickness(mil)**  
 00 = Custom thickness  
 01 = 10mil

**20 = 2000 Series**  
**OI = OpTIM™ Insulator**

**SEM (North America) Inc.**

Tel: +1 585-643-2000  
 Fax: +1 585-427-7216  
 Address: 1555 Jefferson Road,  
 Rochester, NY 14623

**SEM Belgium bv**

+32 59 560 270  
 Schatting 73,  
 8210 Zedelgem, Belgium

**SEM Asia Ltd.**

+852 2686 8168  
 +852 2686 8268  
 Unit 1, 3/F Block A, New Trade Plaza,  
 6 On Ping Street, Shatin, N.T., Hong Kong

**SEM (Dongguan) Ltd.**

+86-769-8334 1628  
 +86-769-8334 2028  
 No. 8A Qiaoxin Road, Qiaotou,  
 Dongguan, Guangdong, China  
 Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.