

**Features and Benefits**

- Superior thermal performance
- 3.5 W/m-K thermal conductivity
- Easy to dispense
- Easy storage
- Ultra-conforming for fragile and low stress applications
- Ambient or accelerated cure schedules in elevated temperature



**Typical Applications**

- Automotive electronics
- PCBA to housing
- Discrete components to housing
- Fiber optic telecommunications equipment

**Appliances supplied**

- Dispensing Gun
- Static mixer

**Direction for Use**

- Install the twin barrel onto the gun, attach static mixer in front end,
- Squeeze the handle to press puncher for materials to come out from the nozzle.


OP-3500 Spec03 offers excellent thermal performance and superior conformability. It is a two-component liquid gap filling material, cured at either room or elevated temperature to speed up the curing process. The pre-curing material possesses good thixotropic characteristics as well as low viscosity which is an ideal solution for dispensing. After cured, the mixture became a low modulus elastomer to relieve stresses during thermal cycling.

OP-3500 Spec03 will lightly adhere to surfaces, thus improving surface area contact. The proprietary formulation of OP-3500 Spec03 is RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.

PROPERTIES	OP-3500 Spec03	Test Method
Construction & Composition	Soft silicone elastomer	—
Color	Part A: White / Part B: Blue	Visual
Viscosity (Spindle#6 @ 5 RPM)	Part A:225000cP / Part B:245000cP	ASTM D2196
Density	3.1 g/cm <sup>3</sup>	—
Mix Ratio	1:1	—
Shelf Life @ 25°C	6 months	—
PROPERTIES AS CURED		
Color	Blue	Visual
Hardness	35 Shore 00	ASTM D2240
Continuous Use Temp	-60 to 200 °C	—
Thermal Conductivity	3.5 W/m-K	ASTM D5470 (modified)
Dielectric Strength	220 V/mil	ASTM D149
Dielectric Constant @ 1MHz	12.4	ASTM D150
Volume Resistivity	10 <sup>13</sup> ohm.cm	ASTM D257
Flame Rating	U.L.94 V-O	—
CURE SCHEDULE		
Pot Life @ 25°C	60 min	—
Cure @ 25°C	12 hours	—
Cure @ 100°C	30 min	—

Please contact us for other special requirements

**Product Code and Descriptions**

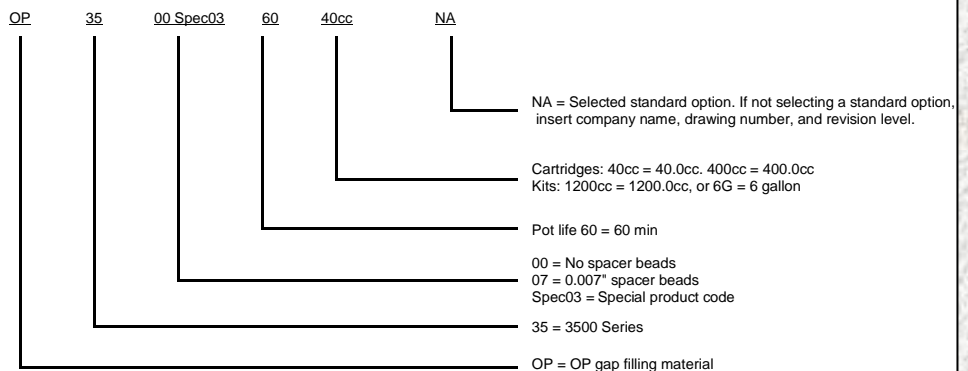

**SEM (North America) Inc.**

Tel: +1 585-643-2000  
Fax: +1 585-427-7216  
Address: 1555 Jefferson Road,  
Rochester, NY 14623

**SEM Belgium bv**

+32 59 560 270  
Schatting 73,  
8210 Zedelgem, Belgium

**SEM Asia Ltd.**

+852 2686 8168  
+852 2686 8268  
Unit 1, 3/F Block A, New Trade Plaza,  
6 On Ping Street, Shatin, N.T., Hong Kong

**SEM (Dongguan) Ltd.**

+86-769-8334 1628  
+86-769-8334 2028  
No. 8A Qiaoxin Road, Qiaotou,  
Dongguan,Guangdong, China  
Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.