

Features and Benefits

- Superior thermal performance
- 2.0 W/m-K thermal conductivity
- Good EMI suppression
- Easy to dispense
- Easy storage
- Ultra-conforming for fragile and low stress applications
- Ambient or accelerated cure schedules in elevated temperature



Typical Applications

- Automotive electronics
- PCBA to housing
- Discrete components to housing
- Fiber optic telecommunications equipment

Appliances supplied

- Dispensing Gun
- Static mixer

Direction for Use

- Install the twin barrel onto the gun, attach static mixer in front end.
- Squeeze the handle to press puncher for materials to come out from the nozzle.


OP-3700 Spec01 offers hybrid absorber/thermal management material that is used for EMI mitigation. It is a two-component liquid gap filling material, cured at either room or elevated temperature to speed up the curing process. Filler particle composition imparts both excellent thermal conductivity and good EMI suppression in the microwave frequency.

OP-3700 Spec01 will lightly adhere to surfaces, thus improving surface area contact. The proprietary formulation of OP-3700 Spec01 is RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.

PROPERTIES	OP-3700 Spec01	Test Method
Construction & Composition	Soft silicone elastomer	—
Color	Part A: Grey / Part B: Grey	Visual
Viscosity (Spindle#7 @ 10 RPM)	Part A: 475000cP Part B: 495000cP	ASTM D2196
Density	4.0 g/cm ³	—
Mix Ratio	1:1	—
Shelf Life @ 25°C	6 months	—
PROPERTIES AS CURED		
Color	Grey	Visual
Hardness	55 Shore 00	ASTM D2240
Continuous Use Temp	-40 to 175 °C	—
Thermal Conductivity	2.0 W/m-K	ASTM D5470 (modified)
EMI Attenuation @ 10 GHz	48 dB/cm	—
Volume Resistivity	2.0 x 10 ¹² ohm.cm	ASTM D257
Flame Rating	U.L.94 V-O	—
CURE SCHEDULE		
Pot Life @ 25°C	30 min	—
Cure @ 25°C	3 hours	—
Cure @ 100°C	10 min	—
Please contact us for other special requirements		

Product Code and Descriptions

OP 37 00 Spec01 60 40cc NA

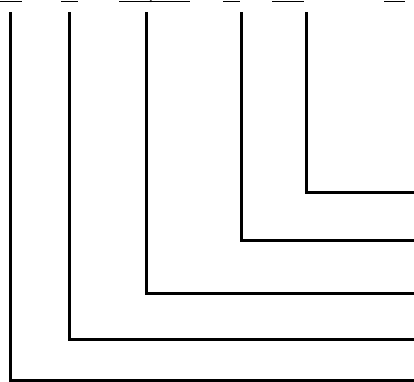

- NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.
- Cartridges: 40cc = 40.0cc, 400cc = 400.0cc
Kits: 1200cc = 1200.0cc, or 6G = 6 gallon
- Pot life 60 = 60 min
- 00 = No spacer beads
07 = 0.007" spacer beads
Spec01 = Special product code
- 37 = 3700 Series
- OP = OP gap filling material

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1555 Jefferson Road,
 Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
 Schatting 73,
 8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168
 +852 2686 8268
 Unit 1, 3/F Block A, New Trade Plaza,
 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628
 +86-769-8334 2028
 No. 8A Qiaoxin Road, Qiaotou,
 Dongguan, Guangdong, China
 Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.