

OP-8200 Spec 07

THERMALLY CONDUCTIVE GAP FILLER

Features and Benefits

- Superior thermal performance
- 10.5 W/m-K thermal conductivity
- Electrically isolating
- RoHS compliant
- Halogen-free



Typical Applications

- Notebook Computers
- Handheld Portable Electronics
- Micro Heat Pipe assemblies
- Micro Processors, Memory Chips and Graphic Processors
- Motor Control
- Wireless Communication Hardware

Optional Configurations

• Can be die-cut into specific dimensions

OP-8200 Spec 07 offers good thermal performance and exceptional conformability. This material conforms to surface irregularities under low application pressures. It is electrically non-conductive and naturally tacky. Additional adhesive is generally not required.


The proprietary formulation of OP-8200 Spec 07 is RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.

Properties	OP-8200 Spec 07	Test Method
Construction & Composition	Soft silicone elastomer	
Color	Grey	Visual
Thickness Range /inch (mm)	0.03"~0.40" (0.762~10.16) in 0.01" (0.254) increments	
Standard Sheet Size	9" x 9"	
Density /g.cm ⁻³	3.3	Section 1
Hardness /Shore 00	60	ASTM D2240
Tensile Strength /psi	34	ASTM D412
UL Flammability Rating	UL94 V0	
Temperature Range /℃	-40℃~200℃	
Thermal Conductivity W.m ⁻¹ .K ⁻¹	10.5	ASTM D5470 (modified)
Breakdown Voltage /(KV/mm)	>10	ASTM D149
Volume Resistivity /ohm.cm	1.95 x 10 ¹³	ASTM D257
Shelf Life /Months	24	

Please contact us for other requirements

Carrier Treatment	Criteria	
Fiber Glass (FG)	Not Recommended	
Rubberized Cloth (RC)	Not Recommended	
Pressure Sensitive Adhesive (PSA)	Not Recommended	
Detachable Adhesive (DA)	Not Recommended	
Aluminum Foil (AL)	Not Recommended	
Kapton (PI)	Not Recommended	
Talc treatment (DAT)	Not Recommended	

Product Code and Descriptions

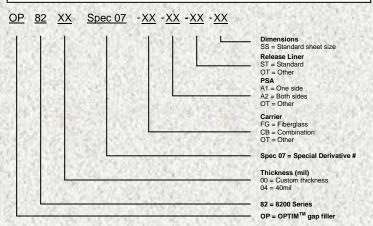

SEM (North America) Inc.

Tel: +1 585-643-2000 Fax: +1 585-427-7216 Address: 1555 Jefferson Road, Rochester, NY 14623

SEM Belgium by

+32 59 560 270

Schatting 73, 8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168 +852 2686 8268 Unit 1, 3/F Block A, New Trade Plaza, 6 On Ping Street, Shatin, N.T., Hong Kong


SEM (Dongguan) Ltd.


+86-769-8334 1628 +86-769-8334 2028 No. 8A Qiaoxin Road, Qiaotou, Dongguan,Guangdong, China Postal code 523525



OP-8200 Spec 07

THERMALLY CONDUCTIVE GAP FILLER

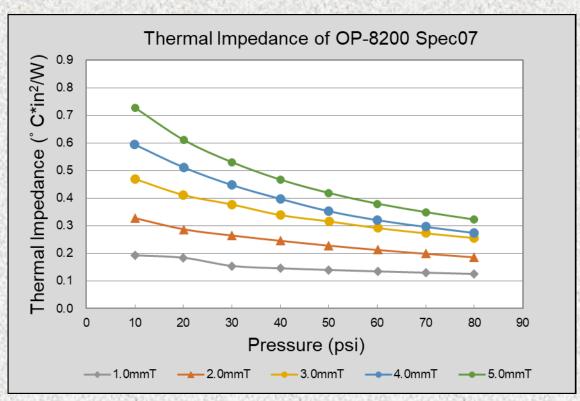

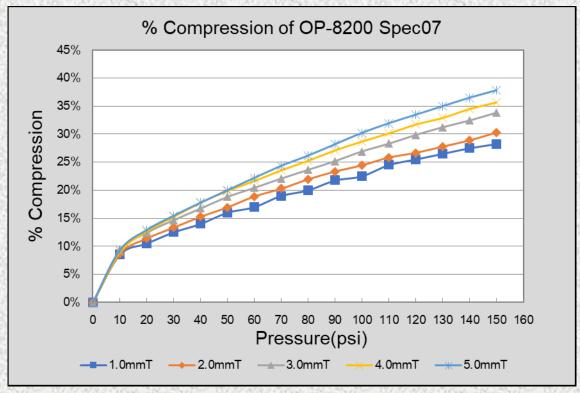

SEM (North America) Inc.

Tel: +1 585-643-2000 Fax: +1 585-427-7216 Address: 1555 Jefferson Road, Rochester, NY 14623

SEM Belgium by

+32 59 560 270

Schatting 73,
8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168 +852 2686 8268 Unit 1, 3/F Block A, New Trade Plaza, 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628 +86-769-8334 2028 No. 8A Qiaoxin Road, Qiaotou Dongguan,Guangdong, China Postal code 523525