


Features and Benefits

- 3.2W/m-K thermal conductivity
- Good conformability
- Naturally tacky
- Electrically isolating
- RoHS compliant
- Halogen-free

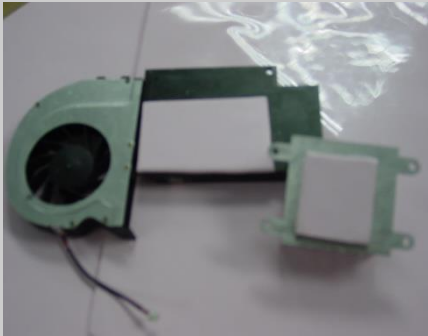

Typical Applications

- Cooling component to the chassis, frame, or other type of heat spreader
- Mass storage device
- Heat pipe assemblies
- RDRAM memory modules
- Motor control
- Telecommunication hardware

Optional Configurations

- Can be die-cut into specific dimensions

OP-8600 is a high performance thermal gap filler with good conformability. It is effective in blanketing uneven surfaces while transferring heat from the heat source to the cooling component.

It is electrically non-conductive and naturally tacky. Additional adhesive is generally not required. Its RoHS compliant and halogen-free status provides extra assurance for applications that are sensitive to hazardous substances.


Properties	OP-8600 Series	Test Method
Construction & Composition	Soft silicone elastomer	—
Color	Pink	Visual
Thickness Range /inch (mm)	0.01"~0.40" (0.254~10.16) in 0.01" (0.254) increments	—
Standard Sheet Size	9" x 9"	—
Density /g.cm ⁻³	1.55	—
Hardness /Shore 00	45	ASTM D2240
Tensile Strength /psi	34	ASTM D412
UL Flammability Rating	UL94 HB	E109346
Temperature Range /°C	-40~200°C	—
Thermal Conductivity W.m ⁻¹ .K ⁻¹	3.2	ASTM D5470 (modified)
Breakdown Voltage /V	>3000 (Thickness ≤ 0.02") >5000 (Thickness = 0.03~0.04") >6000 (Thickness ≥ 0.05")	ASTM D149
Volume Resistivity /ohm.cm	3.0 x 10 ¹³	ASTM D257
Dielectric Constant @ 1MHz	3.3	ASTM D150
Shelf Life /Months	24	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for ≤ 0.03" (0.75mm)
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Not Recommended
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Optional to all thickness

Product Code and Descriptions

OP 86 XX - XX - XX - XX - XX

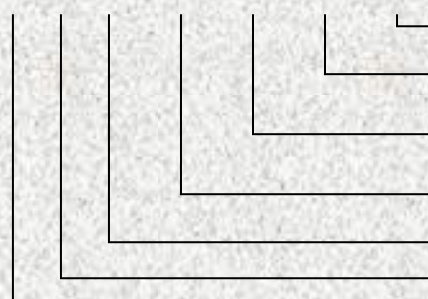

- Dimensions**
 SS = Standard sheet size
 CD = Custom dimensions
- Release Liner**
 ST = Standard
 OT = Other
- PSA**
 A1 = One side
 A2 = Both sides
 OT = Other
- Carrier**
 FG = Fiberglass
 OT = Other
- Thickness (mil)**
 00 = Custom thickness
 04 = 40mil
- 86 = 8600 Series**
OP = OpTIM™ gap filler

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1555 Jefferson Road,
 Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
 Schatting 73,
 8210 Zedelgem, Belgium



SEM Asia Ltd.

+852 2686 8168
 +852 2686 8268
 Unit 1, 3/F Block A, New Trade Plaza,
 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628
 +86-769-8334 2028
 No. 8A Qiaoxin Road, Qiaotou,
 Dongguan, Guangdong, China
 Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

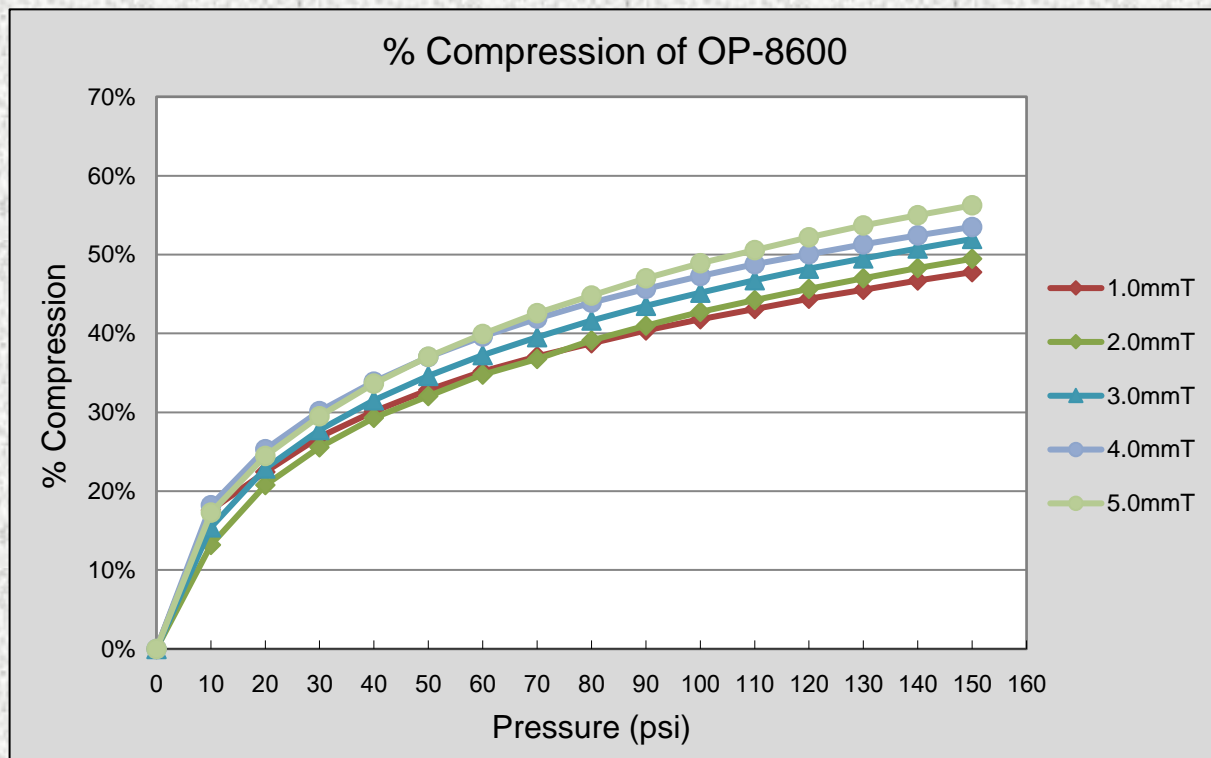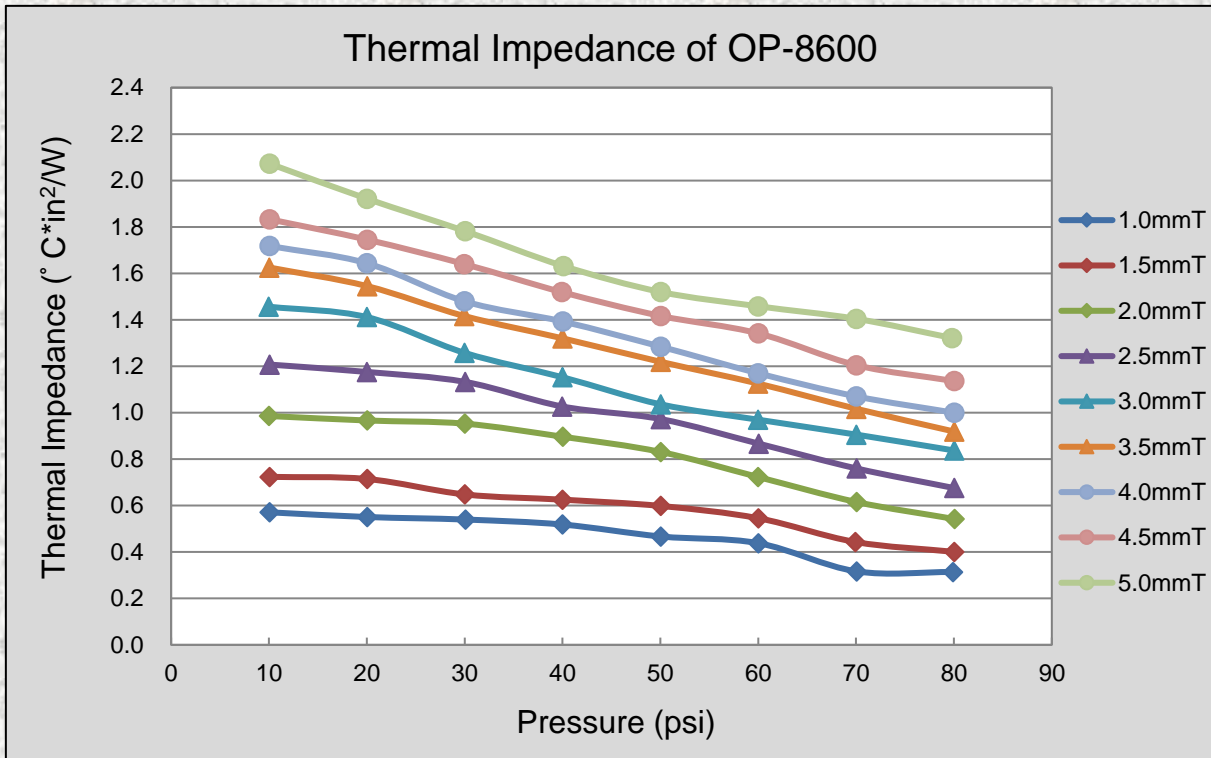

SEM (North America) Inc.

Tel: +1 585-643-2000
Fax: +1 585-427-7216
Address: 1555 Jefferson Road,
Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
Schatting 73,
8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168
+852 2686 8268
Unit 1, 3/F Block A, New Trade Plaza,
6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628
+86-769-8334 2028
No. 8A Qiaoxin Road, Qiaotou,
Dongguan, Guangdong, China
Postal code 523525