


Features and Benefits

- 2.0W/m-K thermal conductivity
- Good compressibility
- Non-silicone gap pad
- RoHS compliant
- Halogen-free

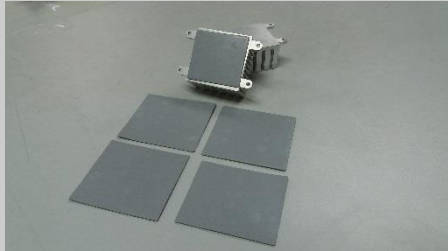

Typical Applications

- Cooling component to the chassis, frame, or other type of heat spreader
- Mass storage devise
- Heat pipe assemblies
- RDRAM memory modules
- Motor control
- Telecommunication hardware

Optional Configurations

Can be die-cut into specific dimensions

OP-6300 Spec 01 offers moderate thermal performance and low oil-bleeding properties. This material conforms to surface irregularities under low application pressures. It is exceptionally soft and is suitable for applications that require moderate thermal performance.


The non-silicone formulation of OP-6300 Spec 01 is RoHS compliant and Halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.

Properties	OP-6300 Spec 01	Test Method
Construction & Composition	Non-silicone elastomer	—
Color	Dark Grey	Visual
Thickness Range /inch (mm)	0.02"~0.20" (0.508~5.08) in 0.01" (0.254) increments	—
Standard Sheet Size	9" x 9"	—
Density /g.cm ³	2.55	—
Hardness /Shore 00	50	ASTM D2240
Tensile Strength /psi	10	ASTM D412
UL Flammability Rating	UL94 V0	—
Temperature Range /°C	-40~125°C	—
Thermal Conductivity W.m ⁻¹ .K ⁻¹	2.0	ASTM D5470 (modified)
Breakdown Voltage / (KV/mm)	>8	ASTM D149 (modified)
Volume Resistivity /ohm.cm	2.49 x 10 ¹²	ASTM D257
Siloxane Volatiles	0	GC-FID
Shelf life	12 months	—

Please contact us for other requirements

Product Code and Descriptions

OP 63 XX Spec 01 -XX -XX -XX -XX

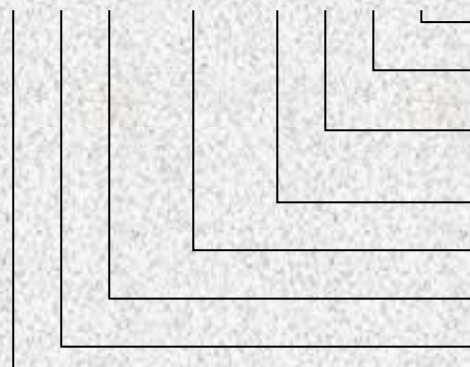

- Dimensions**
SS = Standard sheet size
- Release Liner**
ST = Standard
OT = Other
- PSA**
A1 = One side
A2 = Both sides
OT = Other
- Carrier**
FG = Fiberglass
CB = Combination
OT = Other
- Spec 01 = Special Derivative #**
- Thickness (mil)**
00 = Custom thickness
04 = 40mil
- 63 = 6300 Series**
OP = OPTIM™ gap filler

Carrier Treatment	Criteria
Fiber Glass (FG)	Not Recommended
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Not Recommended
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Not Recommended

SEM (North America) Inc.

Tel: +1 585-643-2000
Fax: +1 585-427-7216
Address: 1555 Jefferson Road,
Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
Schatting 73,
8210 Zedelgem, Belgium



SEM Asia Ltd.

+852 2686 8168
+852 2686 8268
Unit 1, 3/F Block A, New Trade Plaza,
6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628
+86-769-8334 2028
No. 8A Qiaoxin Road, Qiaotou,
Dongguan, Guangdong, China
Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

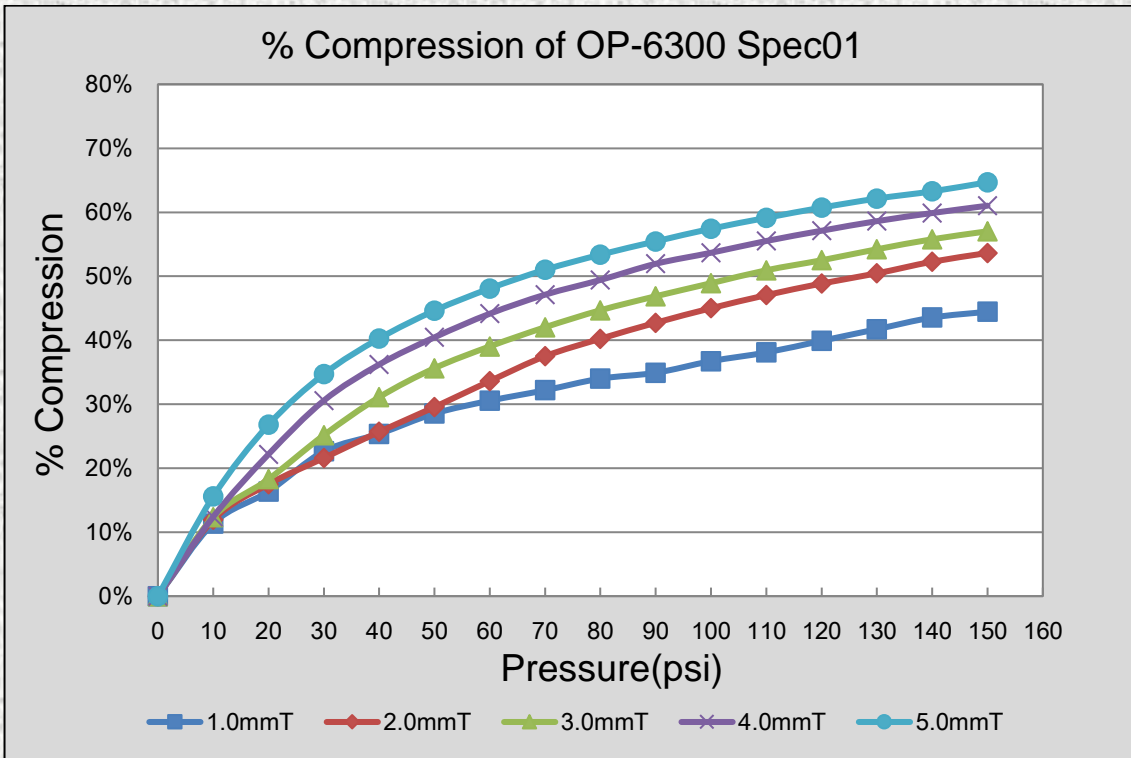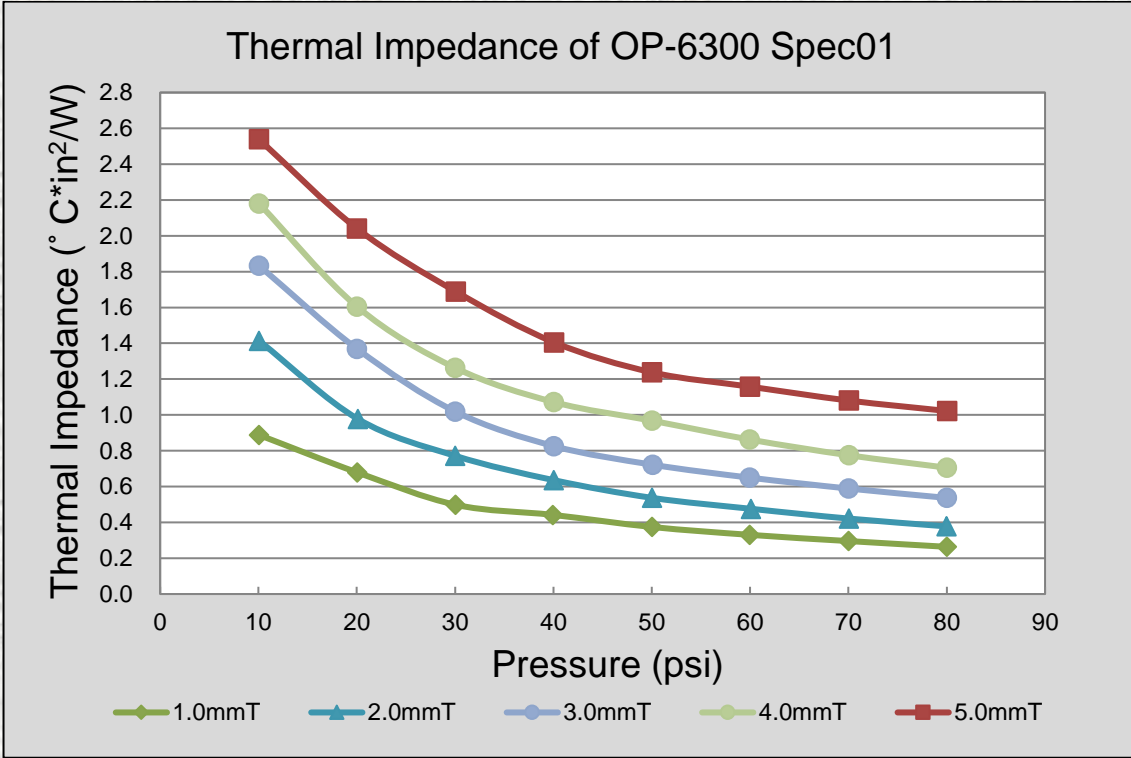

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1555 Jefferson Road,
 Rochester, NY 14623

SEM Belgium bv

+32 59 560 270
 Schatting 73,
 8210 Zedelgem, Belgium

SEM Asia Ltd.

+852 2686 8168
 +852 2686 8268
 Unit 1, 3/F Block A, New Trade Plaza,
 6 On Ping Street, Shatin, N.T., Hong Kong

SEM (Dongguan) Ltd.

+86-769-8334 1628
 +86-769-8334 2028
 No. 8A Qiaoxin Road, Qiaotou,
 Dongguan, Guangdong, China
 Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.